
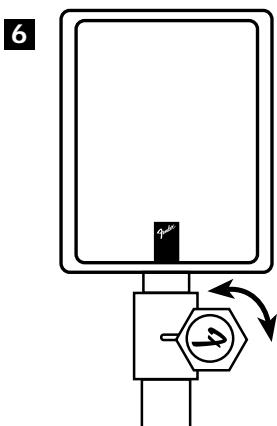
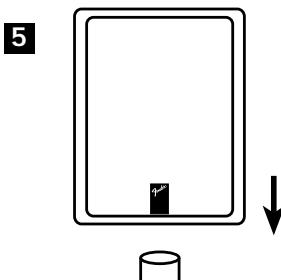
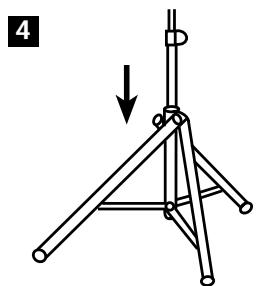
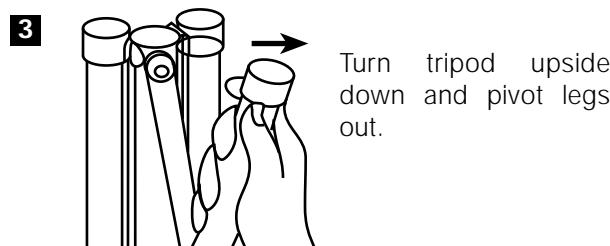
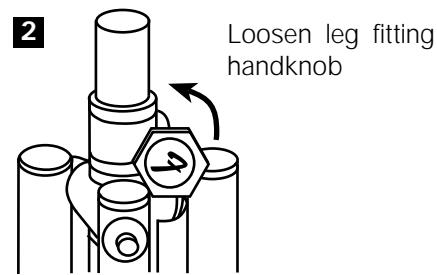


## YOUR FENDER® ST-75 TRIPOD SPEAKER STAND

The ST-75 heavy duty tripod speaker stand is constructed from rugged anodized aluminum alloy tubing and is capable of supporting up to 75 lbs. (34 kg) of properly installed equipment. The ST-75's dual diameter mounting pole features both 1 3/8" and 1.5" (35 mm & 38 mm) diameters and makes a great accessory for the Fender Artist Series or SPL Series 1211 Mk-II and 1225 Mk-II loudspeaker systems. Because loudspeaker enclosures placed on the ST-75 could be damaged or cause bodily harm if they fall, please read through these instructions and heed all caution and safety warnings.

### IMPORTANT

When setting up your ST-75 tripod speaker stand, make sure it is placed on a dry, flat and secure surface. Also, when placing, raising or lowering gear on the ST-75, it is recommended that at least two people undertake these procedures. All telescoping tubes have gray-colored warning stripes to indicate the maximum extension of the tube. **DO NOT EXCEED THESE WARNING INDICATORS.**

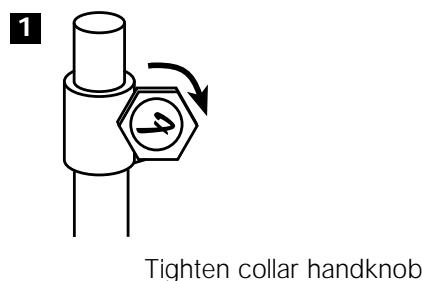

Turn tripod upright and slide leg fitting to adjust the width of the leg spread until the cross bars are parallel to the floor. This will ensure the ST-75 is at its maximum footprint (Using a smaller footprint will adversely affect the stability of the unit). Tighten the handknob.

Place your speaker on the stand. Remember to secure all wires coming from the ST-75 for reasons of both safety and good presentation (loose wires can be tripped on and give a cluttered, unprofessional appearance).

Loosen collar handknob and raise equipment to the desired height. Re-tighten handknob and check the stability of the unit at the desired height setting.

### REMEMBER ...

Check to ensure that all handknobs are secure when supporting equipment.

Always loosen handknobs with caution.

Clean your ST-75 Tripod using a damp cloth or any non-abrasive cleaner.

Make sure that speakers are securely mounted on the stand. **Do not exceed published weight limitations for the ST-75.**